


- Ugelli FOG in ottone / Brass FOG nozzles

Solo ugello Fog

Fog nozzle

Filettatura / thread 10/24UNC/2A
peso / weight 3 gr.



Materiale:

- 1) Corpo in ottone
- 2) Cono inox
- 3) Orifizio inox

Material:

- 1) Brass body
- 2) Stainless steel cone
- 3) Stainless steel orifice



MT.NP10

peso / weight 3 gr.


Tappo in ottone filettato
10/24UNC/2A

Brass cap thread
10/24UNC/2A

Ugello Fog con valvola antigoccia

Fog nozzle with anti-drip check valve

Filettatura / thread 10/24UNC/2A
peso / weight 9 gr.

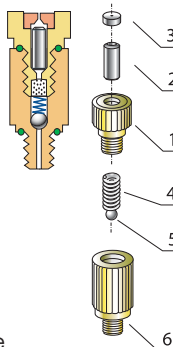

Materiale:

- 1) Corpo in ottone
- 2) Cono inox
- 3) Orifizio inox
- 4) Molla inox
- 5) Sfera in gomma
- 6) Adattatore in ottone

Material:

- 1) Brass body
- 2) Stainless steel cone
- 3) Stainless steel orifice
- 4) Stainless steel spring
- 5) Rubber ball seal
- 6) Brass adapter


Tabella
port./press.
Vedi pagina
Table flow rate
See page

28

Ugello Fog con valvola antigoccia e filtro

Fog nozzle with anti-drip check valve and filter

Filettatura / thread 10/24UNC/2A
peso / weight 12 gr.

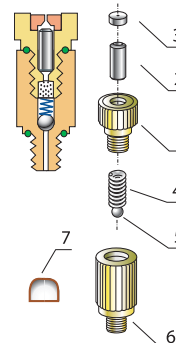

Materiale:

- 1) Corpo in ottone
- 2) Cono inox
- 3) Orifizio inox
- 4) Molla inox
- 5) Sfera in gomma
- 6) Adattatore in ottone
- 7) Filtro 60 micron


Material:

- 1) Brass body
- 2) Stainless steel cone
- 3) Stainless steel orifice
- 4) Stainless steel spring
- 5) Rubber ball seal
- 6) Brass adapter
- 7) Filter 60 micron

Ugello Fog con valvola antigoccia e filtro

Fog nozzle with anti-drip check valve and filter

Filettatura / thread 1/8" - NPT - M
peso / weight 13 gr.

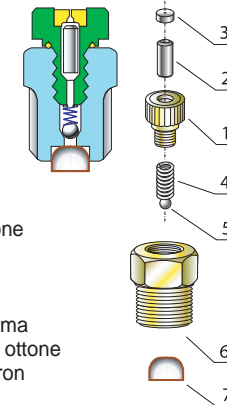

Materiale:

- 1) Corpo in ottone
- 2) Cono inox
- 3) Orifizio inox
- 4) Molla inox
- 5) Sfera in gomma
- 6) Adattatore in ottone
- 7) Filtro 60 micron

Material:

- 1) Brass body
- 2) Stainless steel cone
- 3) Stainless steel orifice
- 4) Stainless steel spring
- 5) Rubber ball seal
- 6) Brass adapter
- 7) Filter 60 micron

Codice Code	Fattore portata Flow rate
MT.151	15
MT.201	20
MT.301	30
MT.401	40
MT.501	50
MT.601	60
MT.801	80
MT.1001	100

Codice Code	Fattore portata Flow rate
MT.154	15
MT.204	20
MT.304	30
MT.404	40
MT.504	50
MT.604	60
MT.804	80
MT.1004	100

Codice Code	Fattore portata Flow rate
MT.155LF	15
MT.205LF	20
MT.305LF	30
MT.405LF	40
MT.505LF	50
MT.605LF	60
MT.805LF	80
MT.1005LF	100


Codice Code	Fattore portata Flow rate
MT.159LF	15
MT.209LF	20
MT.309LF	30
MT.409LF	40
MT.509LF	50
MT.609LF	60
MT.809LF	80
MT.1009LF	100

- Ugelli FOG in acciaio inox AISI 304 / Stainless steel AISI 304 FOG nozzles

Solo ugello Fog
in acciaio inox AISI 304

*Stainless steel AISI 304
Fog nozzle*

Filettatura / thread 10/24UNC/2A
peso / weight 3 gr.

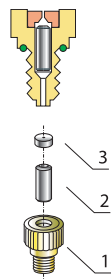

Materiale:

- 1) Corpo in inox
- 2) Cono in inox
- 3) Orifizio in inox

Material:

- 1) Stainless steel body
- 2) Stainless steel cone
- 3) Stainless steel orifice




MT.NP10SS

peso / weight 3gr.

Tappo in acciaio inox AISI 304
filettato 10/24UNC/2A

*Stainless steel AISI 304
cap thread 10/24UNC/2A*

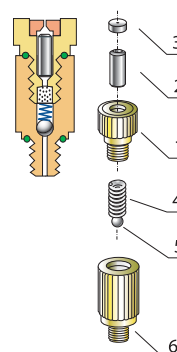

Materiale:

- 1) Corpo inox
- 2) Cono in inox
- 3) Orifizio in inox
- 4) Molla in inox
- 5) Sfera in gomma
- 6) Adattatore in inox

Material:


- 1) Stainless steel body
- 2) Stainless steel cone
- 3) Stainless steel orifice
- 4) Stainless steel spring
- 5) Rubber ball seal
- 6) Stainless steel adapter

Tabella
port./press.
Vedi pagina
Table flow rate
See page
28

Ugello Fog in acciaio inox AISI 304
con valvola antigoccia e filtro

*Stainless steel AISI 304 Fog nozzle
with anti-drip check valve and filter*

Filettatura / thread 1/8» - NPT - M
peso / weight 13 gr.

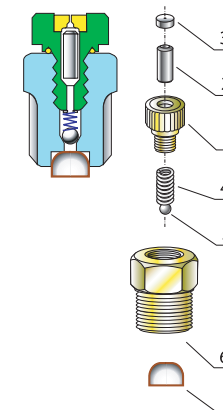

Materiale:

- 1) Corpo in inox
- 2) Cono in inox
- 3) Orifizio in inox
- 4) Molla in inox
- 5) Sfera in gomma
- 6) Adattatore in inox
- 7) Filtro 60 micron

Material:

- 1) Stainless steel body
- 2) Stainless steel cone
- 3) Stainless steel orifice
- 4) Stainless steel spring
- 5) Rubber ball seal
- 6) Stainless steel adapter
- 7) Filter 60 micron

Codice Code	Fattore portata Flow rate
MT.151SS	15
MT.201SS	20
MT.301SS	30
MT.401SS	40

Codice Code	Fattore portata Flow rate
MT.154SS	15
MT.204SS	20
MT.304SS	30
MT.404SS	40

Codice Code	Fattore portata Flow rate
MT.159LFSS	15
MT.209LFSS	20
MT.309LFSS	30
MT.409LFSS	40

- Ugelli FOG accessori / FOG nozzles accessories



MT.CV1010SS

peso / weight 5 gr.

Adattatore in acciaio inox AISI 304, entrata ed uscita filetto 10/24UNC/2A

Stainless steel AISI 304 adapter, inlet and outlet thread 10/24UNC/2A



MT.SG10SS

peso / weight 7 gr.

Manicotto a saldare in acciaio inox AISI 304, per tubo ø12mm, filetto 10/24UNC/2A

Stainless steel AISI 304 pipe coupling, to be welded to pipe ø12mm, thread 10/24UNC/2A



WU.0003

peso / weight 40 gr.


Frenafiletto da 25ml con dosatore

Threadsealing bolt 25ml with dispenser

Tabella: portata (l/min) alle pressione indicate (bar)

Table: Flow rate (l/min) versus operating pressure (bar)


Portata Flow rate	7BAR	14BAR	21BAR	28BAR	35BAR	42BAR	56BAR	70BAR	84BAR	100BAR	120BAR
15	X	X	X	0.029	0.033	0.036	0.041	0.046	0.051	0.059	0.074
20	X	X	0.049	0.056	0.063	0.069	0.080	0.089	0.098	0.101	0.114
30	X	0.065	0.080	0.092	0.103	0.113	0.130	0.145	0.159	0.166	0.176
40	0.056	0.080	0.098	0.113	0.126	0.138	0.159	0.178	0.195	0.201	0.215
50	0.077	0.109	0.134	0.154	0.172	0.189	0.218	0.248	0.267	0.275	0.301
60	0.101	0.143	0.175	0.202	0.226	0.248	0.286	0.320	0.351	0.361	0.388
80	0.138	0.195	0.238	0.275	0.308	0.337	0.389	0.435	0.477	0.491	0.527
100	0.178	0.252	0.308	0.355	0.398	0.436	0.503	0.553	0.617	0.635	0.670



MT.WF25

Filtro da 25 micron per ugelli Fog con antigoccia e filtro, filetto 10/24UNC/2A (codice MT.--5LF)

25 micron filter for fog nozzles with antidrip and filter, thread 10/24UNC/2A (code MT.--5LF)



MT.WF60

Filtro 60 micron per ugelli Fog con antigoccia e filtro, filetto 1/8M-NPT (codice MT.--9LF)

60 micron filter for fog nozzles with antidrip and filter, thread 1/8M-NPT (code MT.--9LF)



MT.OR40

O-Ring per ugelli Fog con filetto 10/24UNC/2A
O-Ring for nozzles with thread 10/24UNC/2A


- 70bar raccordi speciali portaugello / 70bar special connections to hold nozzles



AB.1002 peso / weight 45 gr.

Raccordo portaugello in ottone
G1/4F-F, con 1 foro, filetto
10/24UNC/2A

*Brass nozzle holder connection
G1/4F-F, with 1 hole threaded
10/24UNC/2A*



AB.1008 peso / weight 45 gr.

Raccordo portaugello in ottone, ingresso G3/8F, uscita 10/24UNC/2A
Brass holder nozzle connection - inlet G3/8F, outlet 10/24UNC/2A



AB.1001 peso / weight 45 gr.

Raccordo portaugello in ottone
G1/4F-F, con 2 fori disposti a 120°,
filetto 10/24UNC/2A

*Brass nozzle holder connection
G1/4F-F, with 2 holes set at 120°
threaded 10/24UNC/2A*



BR.72610028 peso / weight 60 gr.

Morsetto portaugello in ottone nichelato con foro filettato G1/4F - 10/24UNC/2A
per tubo in plastica ø20mm completo di:
No. 1 Morsetto superiore filetto 10/24UNC/2A, No. 1 Morsetto inferiore,
No. 1 O-Ring, No. 2 Viti inox stringi morsetto

*Nickel plated nozzle holder clamp, with a hole threaded G1/4F - 10/24UNC/2A.
Suitable for plastic hose ø20mm and complete with:
No. 1 Superior clamp with thread 10/24UNC/2A, No. 1 Inferior clamp,
No. 1 O-Ring, No. 2 Stainless steel screws*



AB.1004 peso / weight 35 gr.

Raccordo portaugello in ottone
G1/4M-M, con 1 foro,
filetto 10/24UNC/2A

*Brass nozzle holder connection
G1/4M-M, with 1 hole
threaded 10/24UNC/2A*



ZX.0529 peso / weight 45 gr.

Estensione tubo in rame da 250mm, per ugello FOG con filetto 10/24UNC/2A M-F
Copper pipe extension, 250mm, threaded 10/24UNC/2A M-F



AB.1003 peso / weight 35 gr.

Raccordo portaugello in ottone
G1/4M-M, con 2 fori disposti a 120°,
filetto 10/24UNC/2A

*Brass nozzle holder connection
G1/4M-M, with 2 holes set at 120°
threaded 10/24UNC/2A*



ZX.0532 peso / weight 75 gr.

Estensione tubo in poliammide da 250mm, per ugello FOG
con filetto 10/24UNC/2A
Polyamide pipe extension, 250mm, outlet threaded 10/24UNC/2A

ZX.0531 peso / weight 105 gr.

Estensione di 500mm, in poliammide, per ugello FOG con filetto 10/24UNC/2A
Polyamide pipe extension, 500mm, outlet threaded 10/24UNC/2A