

- Impianto FOG aria-acqua (max 2 ugelli) / Air-water FOG module (max 2 nozzles)



Particolare dell'attacco elettrico idoneo per il modulo compressore aria

Particular of the electric connection suitable for air compressor module

Particolare del regolatore di flusso

Particular of the flow rate regulator



Caratteristiche tecniche:

- Telaio in lamiera plastificata
 - Pompa a palette 3l/h
 - Motore elettrico monofase 110 230V- 50Hz
 - Regolatore di pressione aria
 - Regolatore pressione liquido
 - Manometro pressione aria
 - Manometro pressione liquido
 - Serbatoio in polietilene da 108 l
 - Galleggiante elettrico, 640mm, contatto normalmente aperto per pompa dosatrice
 - Quadro elettrico completo di:
 - interruttore generale ON/OFF
 - trasformatore 220/24V
 - relé
 - fusibili,
- Spie linea: quadro sotto tensione elettrica (BIANCA), mancanza aria o liquido (GIALLA).

Technical features:

- Frame made of sheet plastic
 - Vane pump 3l/h
 - Mono-phase electric motor 110 230V-50Hz
 - Air pressure regulator
 - Solution pressure regulator
 - Air pressure gauge
 - Solution pressure gauge
 - Polyethylene tank, capacity: 108 l
 - Electric float, 640mm, normally open contact for digital dosing pump
 - Electric board complete with:
 - general ON/OFF switch
 - transformer 220/24V
 - relay
 - fuses.
- Warning indicators: electric board ON (WHITE), lack of air or liquid (YELLOW).



MT.SG10SS peso / weight 16 gr.

Ugello aria-acqua ingresso 1/4F-F, costituito da: corpo in acciaio inossidabile AISI 303, ugello aria in ottone nichelato ed ugello acqua in acciaio inox AISI 303.

Air-water nozzle (inlet 1/4F-F), which consists of: stainless steel body (AISI 303), nickel plated brass air cap and stainless steel (AISI 303) water cap.

| Codice Code | Modello Model | Fino a no. ugelli * Up to nozzles no.* | Portata Flow rate l/min | Pressione max Pressure max bar | Potenza Power Watt - Volts | Peso Weight Grr. | Dimensioni (L x P x A) Dimensions (W x L x H) cm |
|----------------|------------------|---|-------------------------------|--------------------------------------|----------------------------------|------------------------|--|
| ZX.0614 | AIR FOGGER | 2 | 0,83 | 10 | 200W - 230V | 17500 | 19 x 35 x 46 |

- Impianto automatico di disinfezione / *Automatic disinfection system*



| Codice Code | Modello Model | Ugelli Nozzles No. | Portata Flow rate l/min | Pressione max Pressure max bar | Potenza Power Volts | Peso Weight gr. | Dimensioni (L x P x A) Dimensions (W x L x H) cm |
|----------------|------------------|--------------------------|-------------------------------|--------------------------------------|---------------------------|-----------------------|--|
| HC.HC05701 | EASY FOG | 39 | 30 | 2 | 240V 50Hz | 500000 | 2 pallets |

Una volta che il veicolo sale sulle pedane dell'impianto di disinfezione EASY FOG, gli ugelli entrano in funzione automaticamente spargendo disinfettante sul veicolo. Quando il veicolo passa attraverso l'impianto, ruote e chassis vengono disinfettati completamente.

EASY FOG fornisce un rapido sistema di protezione per aziende agricole, stabilimenti, prove in campo evitando così, alti costi di manodopera.

As a vehicle drives onto EASY FOG, spray nozzles are operated automatically, dispensing fresh disinfectant onto the vehicle. As the vehicle passes through, the wheels, underside and sills are thoroughly disinfected.

EASY FOG provides a high speed system to protect farms, factory sites and public events, avoiding high labour costs.


DATI TECNICI:

- Montaggio semplice
- Tensione 240V (uso permanente)
- Batterie 12V (uso temporaneo)
- Disinfettante non riciclato
- Disinfezione totale
- Ulteriori ugelli per trattamento chassis
- Il disinfettante non viene diluito con acqua
- Facile da pulire
- Costo di manodopera minimo

STANDARD FEATURES:

- Easy to install
- Mains 240V (for permanent use)
- 12V battery (for temporary use)
- Always fresh disinfectant
- Whole disinfection
- Further nozzles for the underside and sill areas
- Applied disinfectant not diluted with water
- Easy to clean
- Minimal labour costs

- 60bar kit moduli FOG / 60bar kit FOG modules

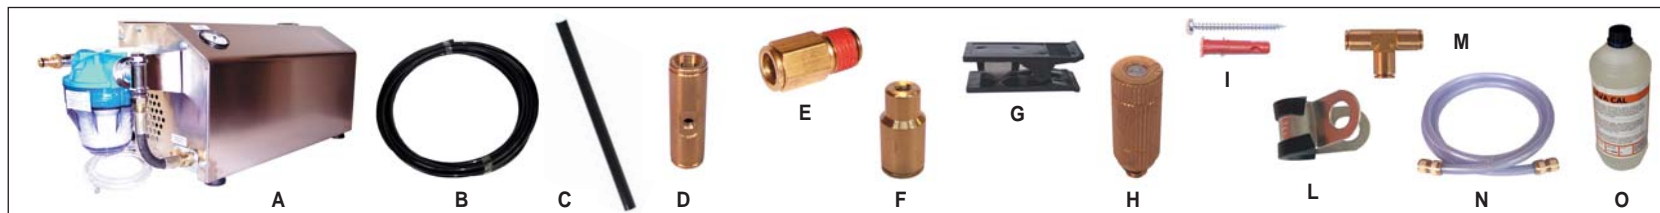

| | Codice Code | Descrizione articoli Description of itmes | Kit 25 Ugelli kit 25 nozzles Q.tà / Q.ty | Kit 50 Ugelli kit 50 nozzles Q.tà / Q.ty | Kit 75 Ugelli kit 75 nozzles Q.tà / Q.ty |
|---|----------------|--|--|--|--|
| A | ZX.0502 | 60bar modulo FOG 25 ugelli 2,3l/min, 60bar, 0,9HP (1x230V)-50Hz <i>60bar FOG module for 25 nozzles, 2,3l/min, 60bar, 0,9HP (1x230V-50Hz)</i> | 1 | | |
| | ZX.0510 | 60bar modulo FOG 50 ugelli 4l/min, 60bar, 0,9HP (1x230V)-50Hz <i>60bar FOG module for 50 nozzles, 4l/min, 60bar, 0,9HP (1x230V-50Hz)</i> | | 1 | |
| | ZX.0511 | 60bar modulo FOG 75 ugelli 5,5l/min, 60bar, 0,9HP (1x230V)-50Hz <i>60bar FOG module for 75 nozzles, 5,5l/min, 60bar, 0,9HP (1x230V-50Hz)</i> | | | 1 |
| B | IT.0010 | Tubo a.p. in poliammide ø9,5x5mm, in rotolo da 25m / <i>H.p. polyamide pipe ø9,5x5mm, 25m roll</i> | 1 | 1 | 1 |
| C | IT.0011 | Tubo a.p. in poliammide ø9,5x5mm, in verga da 750mm / <i>H.p. polyamide pipe ø9,5x5mm, 750mm rod</i> | 24 | 49 | 74 |
| D | IT.0001 | Raccordo portaugello 1 foro in ottone filetto 10/24UNC/2A, connessione rapida ø9,5x5mm <i>Brass coupling with 1 hole and thread 10/24UNC/2A quick connector for hose ø9,5mm</i> | 25 | 50 | 75 |
| E | IT.0021 | Raccordo di partenza in ottone 1/4M-ø9,5mm attacco rapido <i>Start brass coupling 1/4M-ø9,5mm quick connector for hose</i> | 1 | 1 | 1 |
| F | IT.0007 | Raccordo portaugello fine linea 1 foro in ottone 10/24UNC/2A-ø9,5mm connessione rapida <i>End line brass coupling with one hole for nozzles 10/24UNC/2A-ø9,5mm quick connector</i> | 1 | 1 | 1 |
| G | LG.30007100 | Pinza troncatubi per tubo in poliammide ø2-12mm / <i>Tube cutter for polyamide pipe ø2-12mm</i> | 1 | 1 | 1 |
| H | MT.204 | Ugello Fog con valvola antigoccia, foro 2, filetto 10/24UNC/2A <i>Fog nozzle with anti-drip check valve, hole 2, thread 10/24UNC/2A</i> | 25 | 50 | 75 |
| I | WU.0001 | Set viti a croce complete di tasselli ø5 per fissare CLA.PAS008 (200x2 pz) <i>Set of screws and rawlplugs ø5 to fix CLA.PAS008 (200x2 pcs)</i> | 1 | 1 | 1 |
| L | CLA.PAS008 | Passacavo inox gommato per fissaggio tubo poliammide ø9,5mm <i>Rubberized stainless steel clamp to fix polyamide pipe ø9,5mm</i> | 60 | 110 | 160 |
| M | IT.0003 | Raccordo "Tee" giunzione tubi in ottone connessione rapida ø9,5mm <i>Tee brass coupling with quick connections for polyamide pipe ø9,5mm</i> | 1 | 1 | 1 |
| N | ZX.0905 | Kit alimentazione idrica b.p. composto di: 3m tubo e 2 attacchi rapidi Femmina per tubo ø12-15 <i>L.p. water feeding kit, complete with: 3m hose and 2 Female quick couplings for hose ø12-15</i> | 1 | 1 | 1 |
| O | FB.0002 | Disincrostante per ugelli FOG da 1lt / <i>Scale-remover for FOG nozzles (1lt bottle)</i> | 1 | 1 | 1 |